1136

ADA204694

RD&E

CENTER

Technical Report

No. 13375

UNITY VISION BLOCK
WITH FOCAL PLANE

FINAL REPORT

CONTRACT NO. DAAE07-87-CR074

OCTOBER 1988

Robert W. Astheimer
EDO CORPORATION
BARNES ENGINEERING DIVISION
88 Long Hill Cross Roads
By Shelton, Connecticut 06484

U.S. ARMY TANK-AUTOMOTIVE COMMAND
RESEARCH, DEVELOPMENT & ENGINEERING CENTER
Warren, Michigan 48397-5000

20020806109

REPRODUCTION QUALITY NOTICE

This document is the best quality available. The copy furnished to DTIC contained pages that may have the following quality problems:

- Pages smaller or larger than normal.

- Pages with background color or light colored printing.

- Pages with small type or poor printing; and or

- Pages with continuous tone material or color photographs.

Due to various output media available these conditions may or may not cause poor legibility in the microfiche or hardcopy output you receive.

☐ If this block is checked, the copy furnished to DTIC contained pages with color printing, that when reproduced in Black and White, may change detail of the original copy.

(This document contains
blank pages that were
not filmed)

REPORT DOCUMENTATION PAGE		Form Approved OMB No. 0704-0188

1a. REPORT SECURITY CLASSIFICATION Unclassified	1b RESTRICTIVE MARKINGS
2a. SECURITY CLASSIFICATION AUTHORITY	3 DISTRIBUTION/AVAILABILITY OF REPORT Approved for Public Release: Distribution is Unlimited
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE	

4. PERFORMING ORGANIZATION REPORT NUMBER(S)	5. MONITORING ORGANIZATION REPORT NUMBER(S)

6a. NAME OF PERFORMING ORGANIZATION EDO CORPORATION BARNES ENGINEERING DIVISION	6b OFFICE SYMBOL (If applicable)	7a. NAME OF MONITORING ORGANIZATION U.S. Army Tank-Automotive Command
6c. ADDRESS (City, State, and ZIP Code) 88 Long Hill Cross Roads Shelton, Connecticut 06484-0867		7b. ADDRESS (City, State, and ZIP Code) Warren, MI 48397-5000

8a. NAME OF FUNDING/SPONSORING ORGANIZATION	8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER DAAE07-87-C-R074

8c. ADDRESS (City, State, and ZIP Code)	10 SOURCE OF FUNDING NUMBERS			
	PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT ACCESSION NO.

11. TITLE (Include Security Classification)

Unity Vision Block with Focal Plane (U)

12. PERSONAL AUTHOR(S)

Robert W. Astheimer (EDO/Barnes)

13a. TYPE OF REPORT Final	13b. TIME COVERED FROM 87 July to 88 Oct.	14. DATE OF REPORT (Year, Month, Day) 1988 October	15. PAGE COUNT

16. SUPPLEMENTARY NOTATION

17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) Vision Blocks Laser Protection
FIELD	GROUP	SUB-GROUP	

19. ABSTRACT (Continue on reverse if necessary and identify by block number)

A unity-magnification telescope with an intermediate focal plane has been designed to fit into the outer housing of a standard No. 6300790 tank vision block. This has a 29° field of view with an exit pupil of 16 mm, at an eye relief of 70 mm. A slide permits insertion of test cells in the intermediate focal plane for evaluating laser protection devices. The intensity of an incident laser beam is increased by a factor of 50,000 at the intermediate focal plane.

Two units have been built and tested. They show no degradation of normal vision over the entire focal plane.

20. DISTRIBUTION/AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT ☐ DTIC USERS	21. ABSTRACT SECURITY CLASSIFICATION Unclassified
22a. NAME OF RESPONSIBLE INDIVIDUAL Doug Templeton	22b TELEPHONE (Include Area Code) (313) 574-5325	22c. OFFICE SYMBOL AMSTA-RSC

DD Form 1473, JUN 86   Previous editions are obsolete.   SECURITY CLASSIFICATION OF THIS PAGE

TABLE OF CONTENTS

LIST OF ILLUSTRATIONS

4

1.0. SUMMARY

A unity-magnification telescope with an intermediate focal plane has been designed to fit into the outer housing of a standard No. 6300790 tank vision block. This has a 29° field of view with an exit pupil of 16 mm, at an eye relief of 70 mm. A slide permits insertion of test cells in the intermediate focal plane for evaluating laser protection devices. The intensity of an incident laser beam is increased by a factor of 50,000 at the intermediate focal plane.

Two units have been built and tested. They show no degradation of normal vision over the entire focal plane.

2.0. INTRODUCTION AND OBJECTIVES

This is the final report of contract DAAE07-87-CR074 for the U.S. Army Tank Command. The objective of this contract was to develop a unity vision block with an intermediate focal plane, which is contained within the physical envelope of the standard 4 inch vision block number 6300790.

A dimensioned drawing of this vision block is shown in Figure 1. Laser light from anywhere in the field of view will be focused to a point in the intermediate focal plane and thus highly concentrated. This will permit testing various power-limiting concepts such as optical switches and nonlinear absorbers, which may not be sensitive enough to function in the direct laser beam, but would be effective in the high radiation density of a focused point.

The vision block is essentially a window 8 inches wide, 2 inches high and 4 inches thick. Because of refraction, this gives a very wide (almost 90°) horizontal field of view, with a wide aperture which permits binocular vision over much of the field. It is impossible to achieve all these features with an intermediate focal plane within the space limitations. The design problem then is to make an optimum tradeoff among field of view, aperture and image quality, consistent with conforming to the 4 inch vision block dimensions and intended use.

Originally, two quite different tradeoff selections were proposed, one being called a "full aperture system" and the other a "high-resolution system." The full aperture system functioned more like a window and would permit binocular viewing through the full 8 inch by 2 inch area of the vision block. This would be accomplished by plastic lenticular
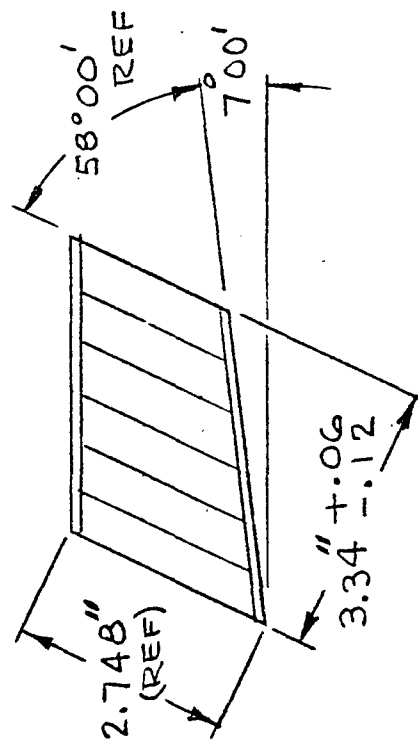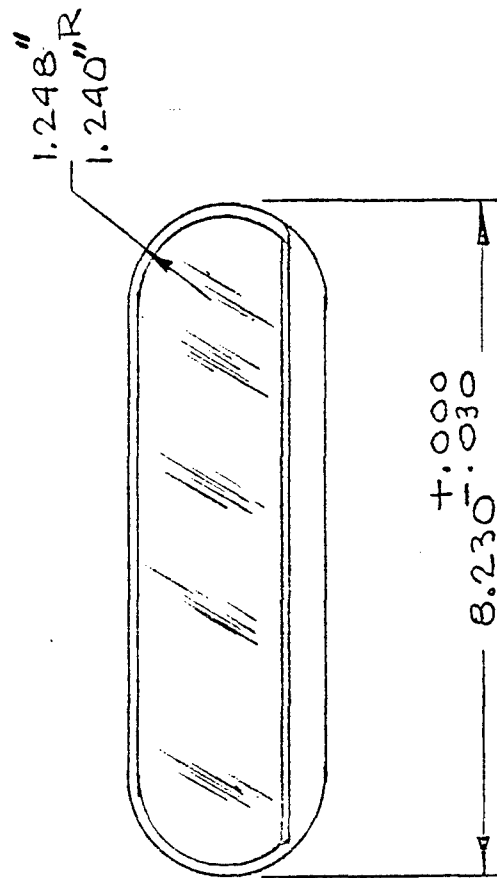
Figure 2-1. Block, Direct Vision No. 6300790

6

arrays made by injection molding. A disadvantage of such a system is that it would not be feasible to provide aberration correction in the plastic lens arrays and the image sharpness would suffer. This could reduce the effectiveness of the optical switch.

The high-resolution system would employ a single optical chain of glass elements in which a high degree of correction could be obtained and would produce a high-quality image. Its disadvantage is that, in order to fit within the prescribed envelope, the exit pupil must be much smaller than 8 inches by 2 inches and binocular vision is not possible.

The U.S. Army Tank-Automotive Command (TACOM) selected the high-resolution system as the most satisfactory for their requirements and no effort was expended on the full aperture system.

3.0. CONCLUSIONS

A design was developed having an intermediate focal plane which gave excellent imagery over a 40° field and which fit into the prescribed vision block envelope. A test slide is provided in the intermediate focal plane to permit insertion of non linear optical switches. Two such units were fabricated and tested. Test results confirmed the design.

4.0. RECOMMENDATIONS

These units highly concentrate collimated light from a laser beam in the intermediate focal plane. This will cause certain non-linear optical materials to become opaque whereas the intensity in the collimated beam would not be sufficient to do so. It is recommended that a number of test cells be made to fit into the slide provided at the intermediate focal plane, for holding these switching materials, many of which are liquid, and that tests then be made to determine their effectiveness for eye protection against lasers.

5.0. DISCUSSION

5.1. Optical Considerations

5.1.1. General

Figure 5-1 shows a simple unity telescope having an intermediate focal plane and defines some of the terms that will be
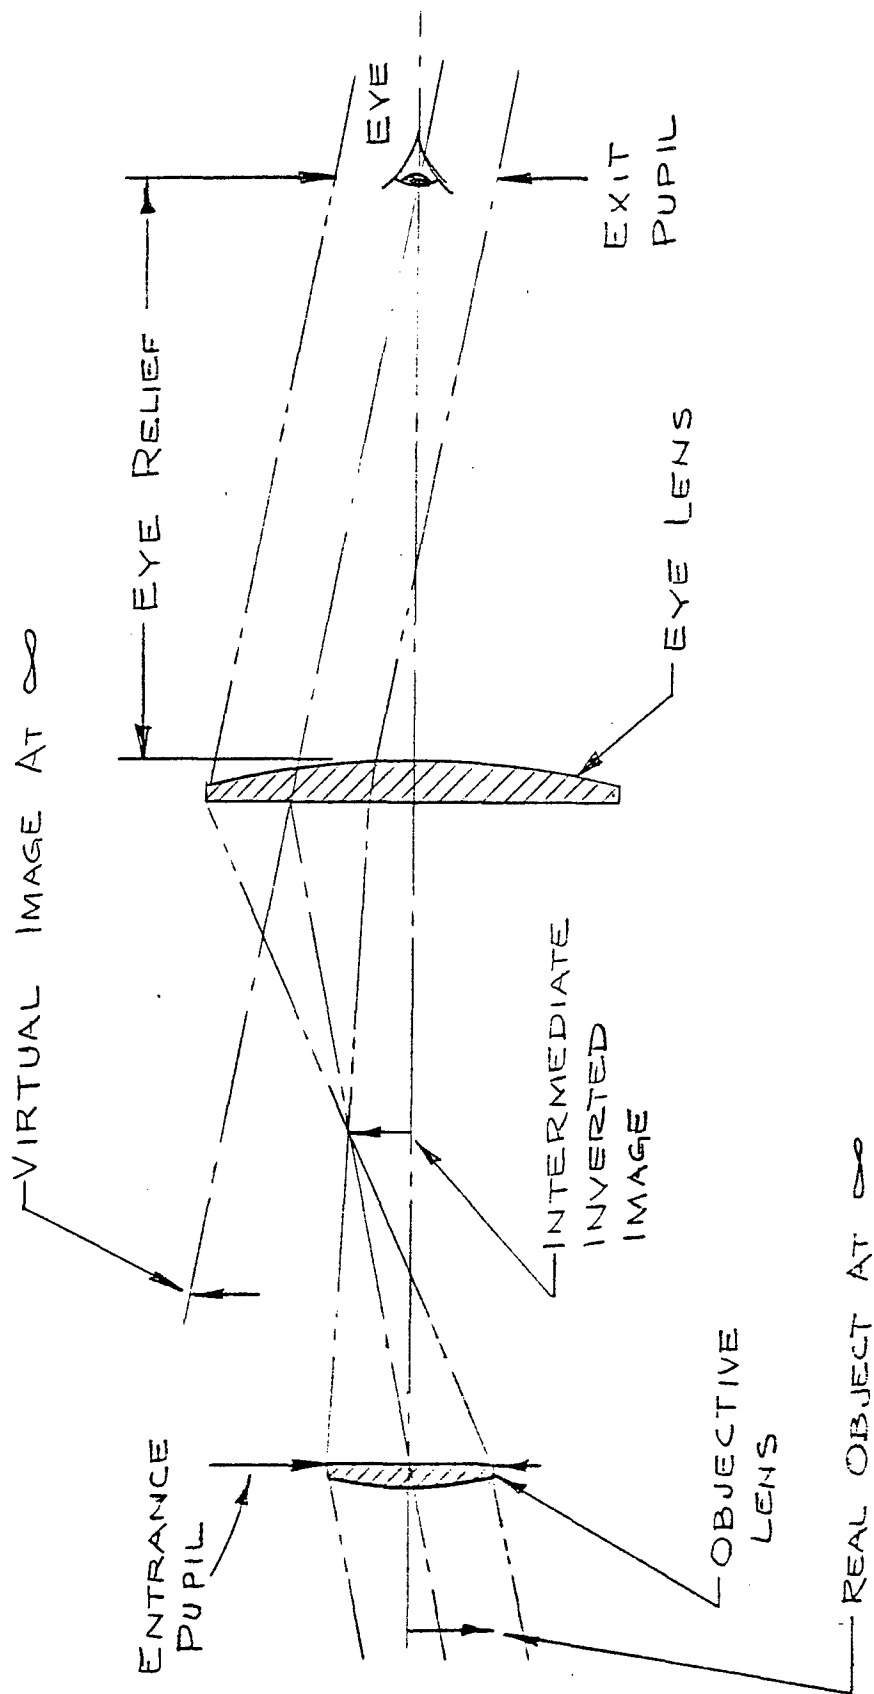
Figure 5-1. Simple Unity Telescope with Intermediate Focal Plane

8

used. The object at infinity is taken as an arrow pointing
downward. The objective lens forms a real inverted image,
while the eye lens converts this to a virtual image at in-
finity, still inverted (arrow pointing up). This figure il-
lustrates the two main problems with such a system, namely,
the inversion of the image, and the large size of the eye
lens necessary to collect the light from the intermediate
image.

The chief difficulty in the optical design was obtaining an
erect unreverted (left-right correct) image to the eye. The
conventional ways of doing this in terrestrial telescopes or
binoculars are by means of an erecting lens, or a pair of
porro prisms, but neither of these would fit in the vision
block without severely restricting the aperture of the sys-
tem. It is necessary at this point to clarify what is meant
by the aperture. Strictly, the useful aperture is the pupil
of the eye, which has a maximum diameter of about 7-mm when
dark-adapted. In a unity telescope, the entrance pupil is
equal to the exit pupil, therefore, the objective lens need
only be 7 mm in diameter. However, this would require pre-
cise positioning of the eye to within the 7 mm exit pupil
which would be an unacceptable restriction in a tank vision
block. It was believed that the exit pupil should be at
least 15 mm in diameter with a field of view of about 40°.
This increases all dimensions of the system.

The distance between the eye lens and the exit pupil is
called the eye relief. It is desirable to have this fairly
long to prevent bumping against the eye lens when the tank
jounces. This also requires enlargement of the system and
these combined requirements rule out the erection lens, or
porro prism solutions.

5.1.2. Image Erection

In order to make maximum use of the vision block envelope,
two 90° folds of the optical path are necessary. These
folding elements can be used for erecting the image, thus
eliminating an erecting lens and shortening the optical
path. However, care must be taken in the selection of the
folding elements to ensure that the final image is both
erect and unreverted. This has been accomplished with a
penta prism and an Amici or roof prism. The penta prism has
the property of reflecting the image without the left-right
reversal that occurs in a plane mirror. The roof prism both
reverts and inverts the image thus fully correcting the
inversion-reversion caused by the objective lens.

5.1.3. Telecentric Condition

The other major design problem is the large diameter of the eye lens needed to get a large field of view as can be seen in Figure 5-1. This diameter can be reduced by using a field lens at the intermediate focal plane, however, this is where the optical switching devices to be tested are to be located Further, since the switching device will be in this focal plane, it is desirable that it be free of curvature, but a field lens produces field curvature. Therefore, instead of using a field lens, the system has been made "telecentric," which means that the central ray of each image point bundle be parallel to the optical axis. The telecentric condition is illustrated in Figure 5-2. Tele-centricity is obtained by means of a stop located either at the front focal point of the objective lens or the back focal length of the eye lens. The front focal point of the objective lens falls within the penta prism as will be seen later and is inaccessible; therefore, the back focal point of the eye lens is used. In our case, the pupil of the eye itself serves as the telecen-tric stop.

Comparing Figures 5-1 and 5-2, it would seem that telecen-tricity reduces the required diameter of the eye lens for a given field of view, but enlarges the objective lens, since the latter is no longer the entrance pupil. This is desir-able, since most efficient use of space occurs when both lenses are the same size.

It is important to note that positioning of the eye at the telecentric stop position is not critical. Deviations do not lose the image but merely degrade the telecentric condition which will merely cause some vignetting at the edges of the field of view.

5.2. Final Optical Design

The first design iteration employing the penta – Amici prism erection system and the telecentric condition resulted in the following characteristics.

- Field of View   40°

- Exit Pupil Diameter   16.0 mm

- Eye Relief   35 mm

This was a symmetrical system using the same objective and eye lens, each consisting of a doublet and singlet element.
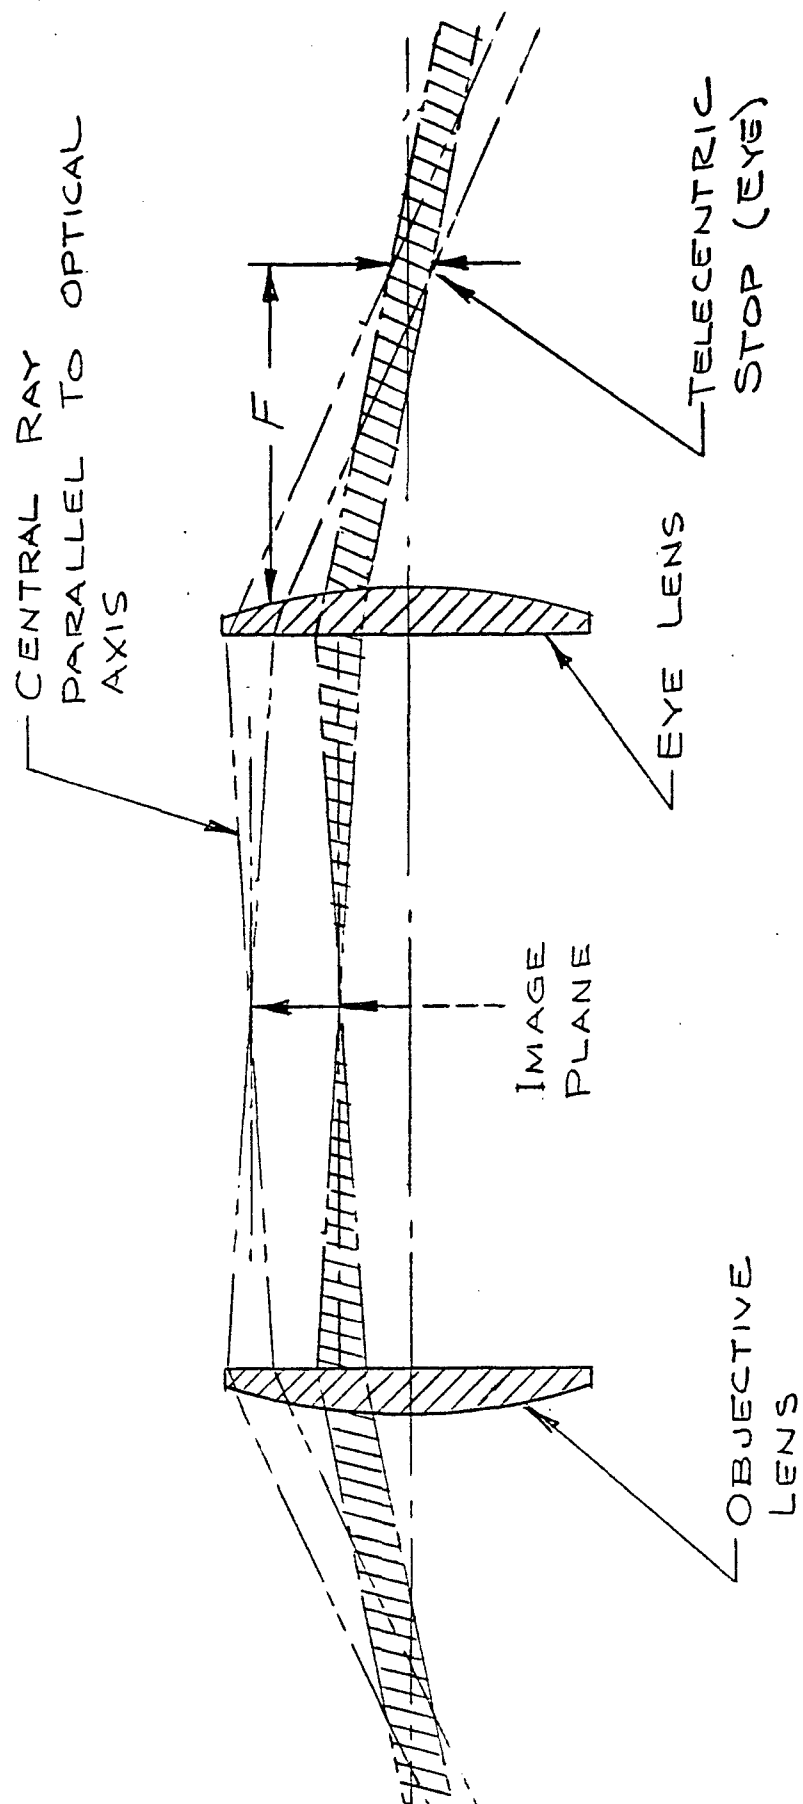
Figure 5-2. Telecentric Condition

11

TACOM felt that a considerably longer eye relief was desirable and requested that we see whether this could be achieved with some sacrifice of field of view. This was done by some enlargement of the eye lens and deviation from the perfect telecentric condition to give the following:

- Field of View   29°

- Exit Pupil Diameter   16 mm

- Eye Relief   70 mm

This configuration was approved by. TACOM and is the one built. Figures 5-3 and 5-4 show top, side and face views of the final system to scale. The path of the extreme field rays are shown in Figure 5-3.

Figure 5-5 shows a set of system performance curves for off-axis ray bundles at 0.0°, 10.3° and 14.5°. The ordinate of all graphs is the angular deviation from the central ray in milliradians, while the abscissa is ray height in the exit pupil from -8 to +8 mm. The left-hand graph of each pair is for ray height variations in the plane of Figure 5-3 (meridional), while the right-hand graph is for ray heights normal to this plane (sagittal). The latter are always symmetrical and therefore only half is shown.

The day-adapted eye has a pupil diameter of about 3-mm. These curves show that the energy from a point source in this pupil will fall within 1 milliradian or 3.5 arc-minutes over the entire field. The ultimate resolution of a perfect human eye is usually taken as 1 arc-minute, although very few people have this visual acuity. Therefore, the degradation in imagery will not be objectionable or probably even detectable to most people. Optical tests on the final unit discussed in Section 5 confirm this.

The intermediate focal length is 71-mm. With a 16-mm entrance pupil and a 1-milliradian or 0.071 mm point-image blur, a laser beam will be concentrated in the intermediate focal plane by a factor of $(16/0.071)^2 = 50,000$.

A test cell will ultimately be placed at the intermediate focal plane and its thickness and refractive index will affect the location of the optical elements. TACOM specified that the cell would be 0.50 inch thick, constructed of BK-7 glass and be filled with materials having refractive indices ranging from 1.35 inches to 1.75 inches. This has been simulated in the design by two 0.25 inch thick glass plates, as shown in Figure 5-3 and a focusing adjustment has
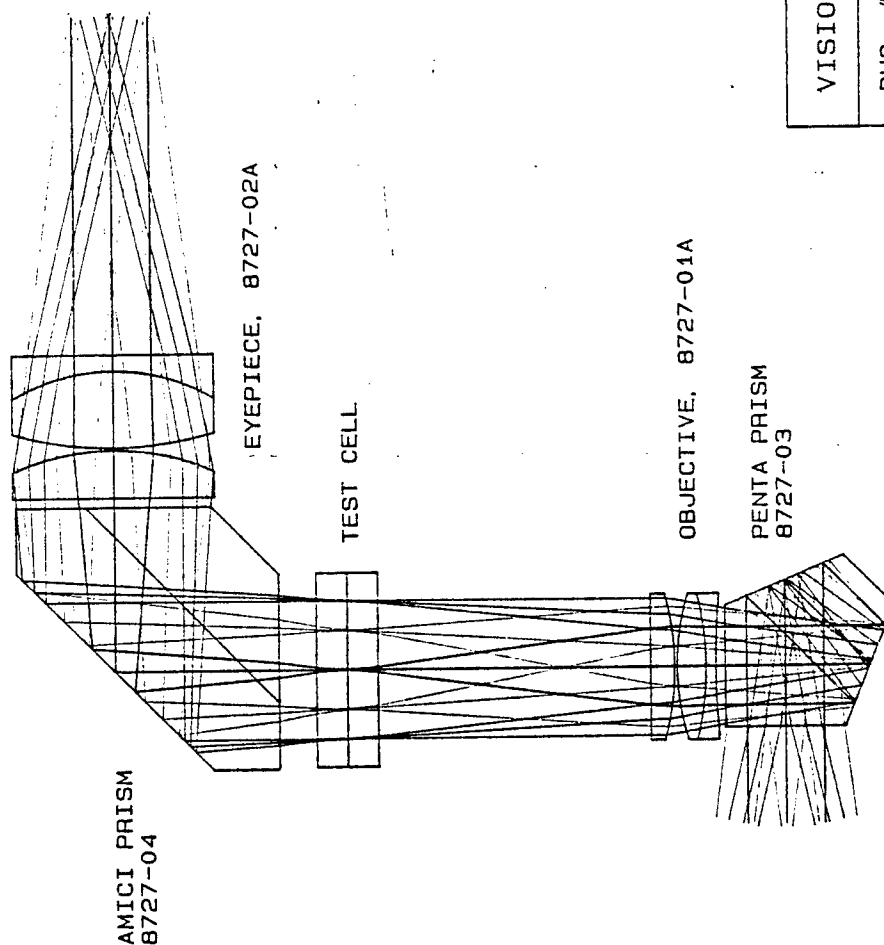
DIMENSIONS IN MILLIMETERS
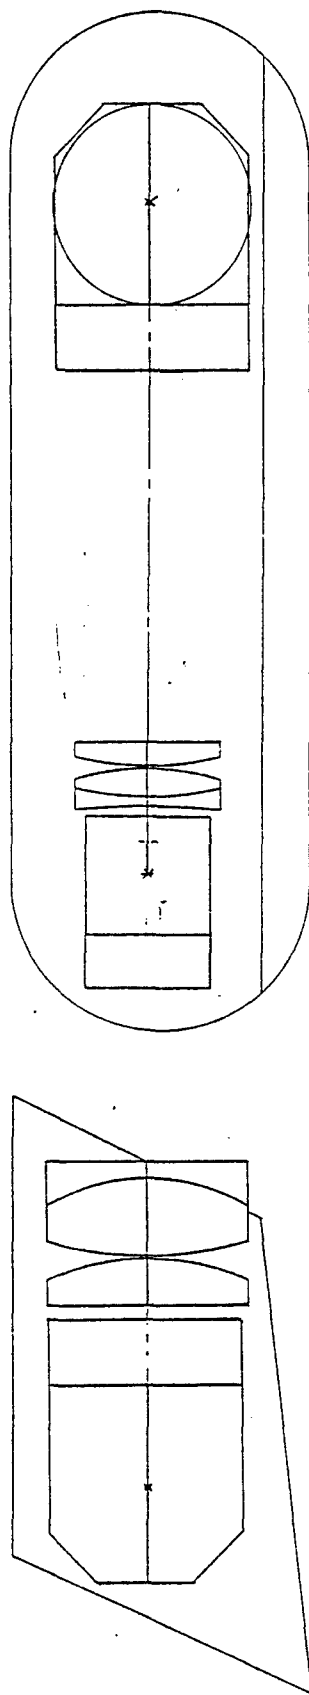
VISION BLOCK OPTICAL LAYOUT

| DWG. # | 8727-100 |

JANUARY 11. 1988

SCALE: 1.00X

EYEPIECE, 8727-02A

TEST CELL

OBJECTIVE, 8727-01A

PENTA PRISM
8727-03

AMICI PRISM
8727-04

by McKINLEY OPTICS, Inc.

Figure 5-3. Vision Block Optical Layout (Top View)

VISION BLOCK SPATIAL LAYOUT

EXIT FACE VIEW

SIDE VIEW
SECTION THROUGH
PRISM & EYEPIECE

8727-1000
SCALE 1:1

JANUARY 11, 1988

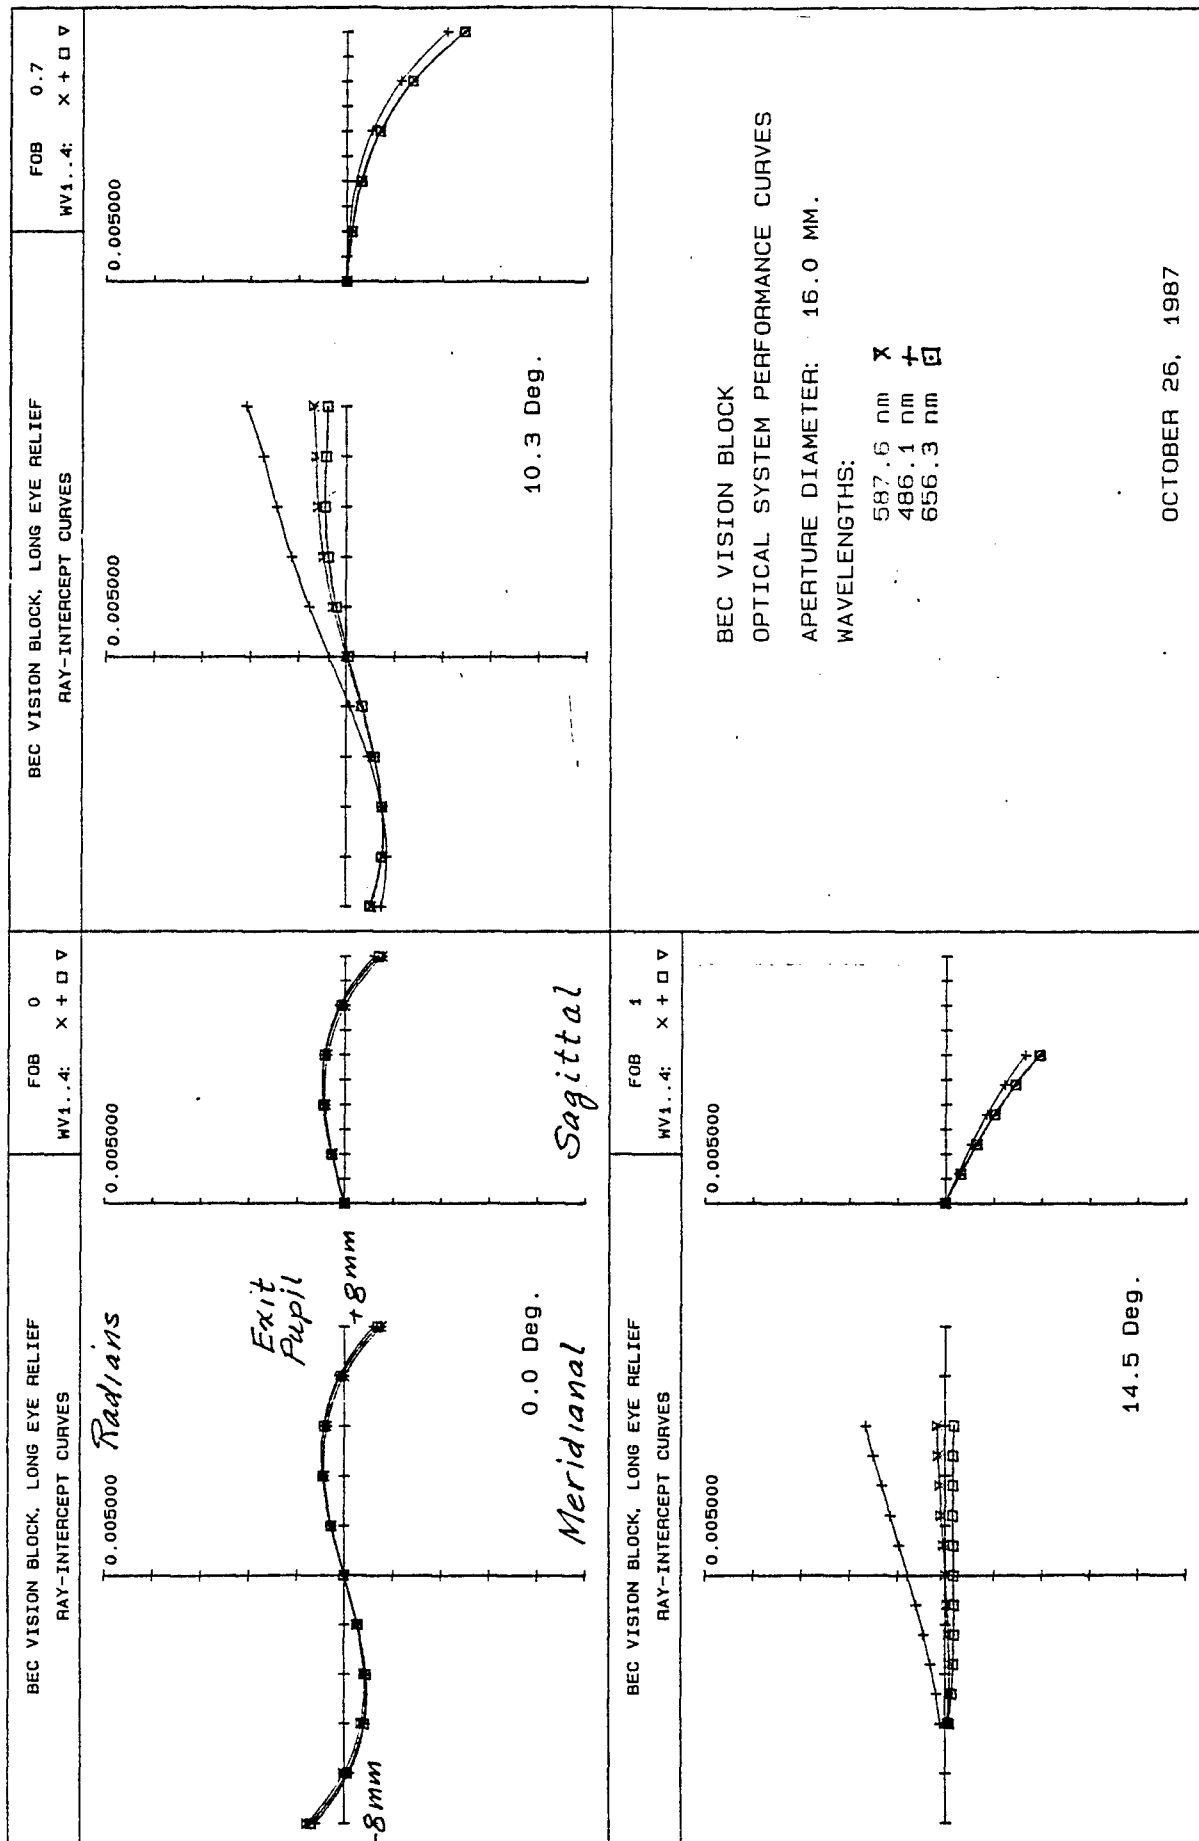Figure 5-4. Vision Block Optical Layout (Face and Side Views)

14

Figure 5-5. Optical System Performance Curves

been provided to accommodate the index variation. Figures 5-6 to 5-9 show detailed drawings of all the optical elements. The axial spacings of the elements are listed below:

- Penta Prism to Objective Lens   2.00 mm

- Objective Lens to Test Cell   56.54 mm

- Test Cell Thickness   12.70 mm

- Test Cell to Amici Prism   7.81 mm

- Amici Prism to Eye Lens   2.00 mm

5.3. Mechanical Packaging and Fabrication

The optical system described in Section 3.4 was packaged in the casing (Part No. 6300790-1) of the No. 6300790 Direct Vision Block. These casings were purchased from Vision Block Company of Melbourne, Florida, which manufactures these vision blocks.

A mounting base for all elements is screwed to the bottom of the casing on the inside. This base directly holds the eye lens and the Amici prism. A set of ways on this base permits the test cell to be inserted from the eyepiece side or rear face of the vision block. A test cell holder is provided which slides into these ways.

The penta prism and objective lens are mounted on a separate plate which slides on the baseplate in the direction of the test cell for focusing, and is locked into position by an Allen screw in a slot. A plate with an aperture for the penta prism fits over the front of the vision block and prevents any extraneous light from entering the system.

Figure 5-10 is a photograph of the vision block assembly, while Figure 5-11 shows the unit with the casing removed. A complete set of drawings including an assembly drawing and details of all parts have been provided separately.

5.4. Testing

The units were tested visually for resolution and field of view and gave very satisfactory results. This is a subjective opinion, however, and in order to make a more quantitative evaluation, photographs were made of resolution charts both in the far field and in the focal plane.

16

AVAILABLE FROM:
ROLYN OPTICS CO.
STOCK NO. 41.0300
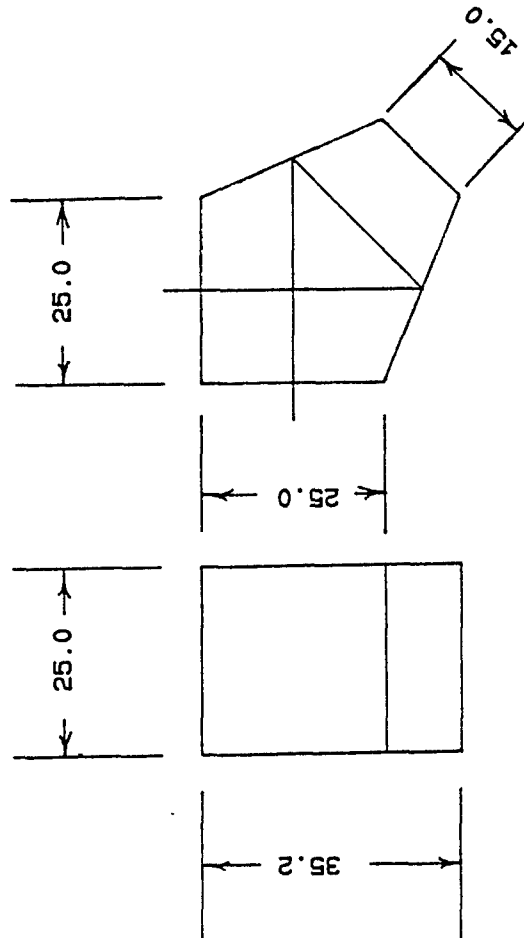
DIMENSIONS IN MILLIMETERS

PENTA PRISM	
DWG. #	8727-03
JANUARY 11, 1988	
SCALE: 1.00X	

by McKINLEY OPTICS, Inc.

Figure 5-6. Penta Prism

17

E.F.L. = 63.01
B.F.L. = 61.00

SURF #	RADIUS	CNTR THK	GLASS
1	149.880 CV	2.00	SF8
2	61.869 CV/CX	6.00	BAK1
3	50.213 CX	0.50	AIR
4	55.433 CX	5.00	BAK1
5	PLANO	B.F.L.	AIR

DIAMETER: 30.00, +0/-.04
CLEAR AP: 29.0

ANTI-REFL COAT GLASS/AIR SURFs
PER MIL-C-675A
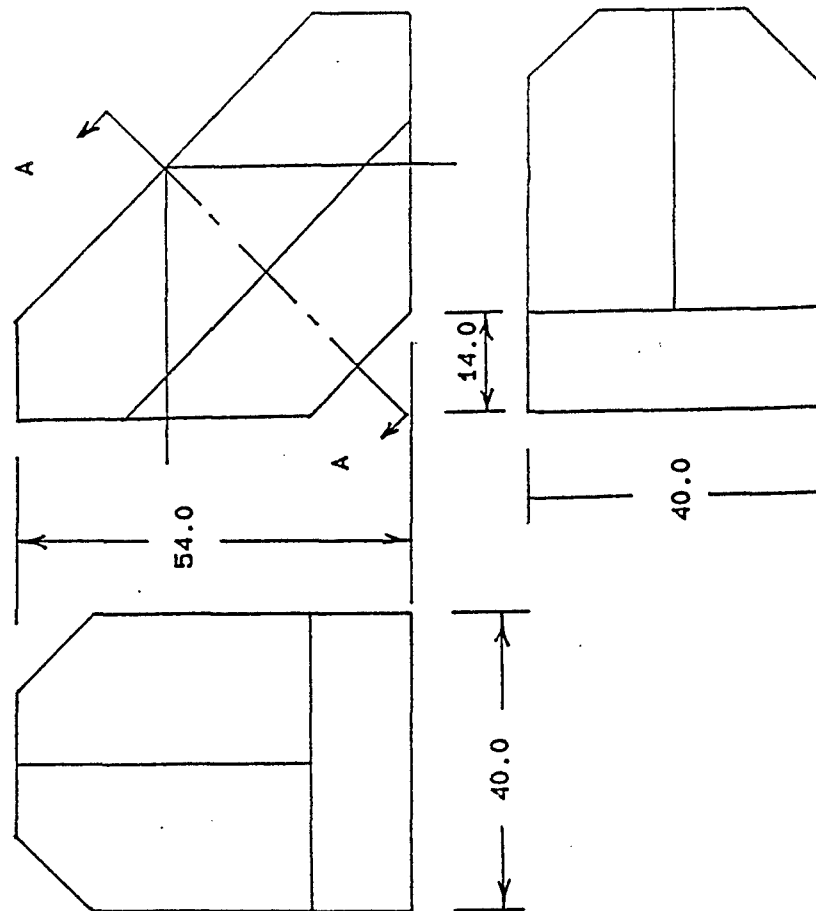
1 23 45

DIMENSIONS IN MILLIMETERS

OBJECTIVE LENS

DWG. #   8727-01A

JANUARY 11, 1988
SCALE: 1.00X

by McKINLEY OPTICS, Inc.

Figure 5-7.   Objective Lens

18

DIMENSIONS IN MILLIMETERS

AMICI PRISM

DWG. # 8727-04

JANUARY 12, 1988
SCALE: 1.00X

by McKINLEY OPTICS. Inc.

AVAILABLE FROM:
ROLYN OPTICS CO.
STOCK NO. 46.0600

Figure 5-8. Amici Prism

19

E.F.L. = 62.40
B.F.L. = 58.20

SURF #	RADIUS	CNTR THK	GLASS
1	614.000 CV	3.0	SF8
2	41.503 CV/CX	16.00	BAK1
3	73.622 CX	0.50	AIR
4	50.213 CX	10.00	BAK1
5	PLANO	B.F.L.	AIR

DIAMETER: 42.00. +0/-.04
CLEAR AP: 41.0

ANTI-REFL COAT GLASS/AIR SURFs
PER MIL-C-675A

DIMENSIONS IN MILLIMETERS

EYEPIECE SYSTEM

DWG. # 8727-02A

JANUARY 11, 1988
SCALE: 1.00X

by McKINLEY OPTICS, Inc.
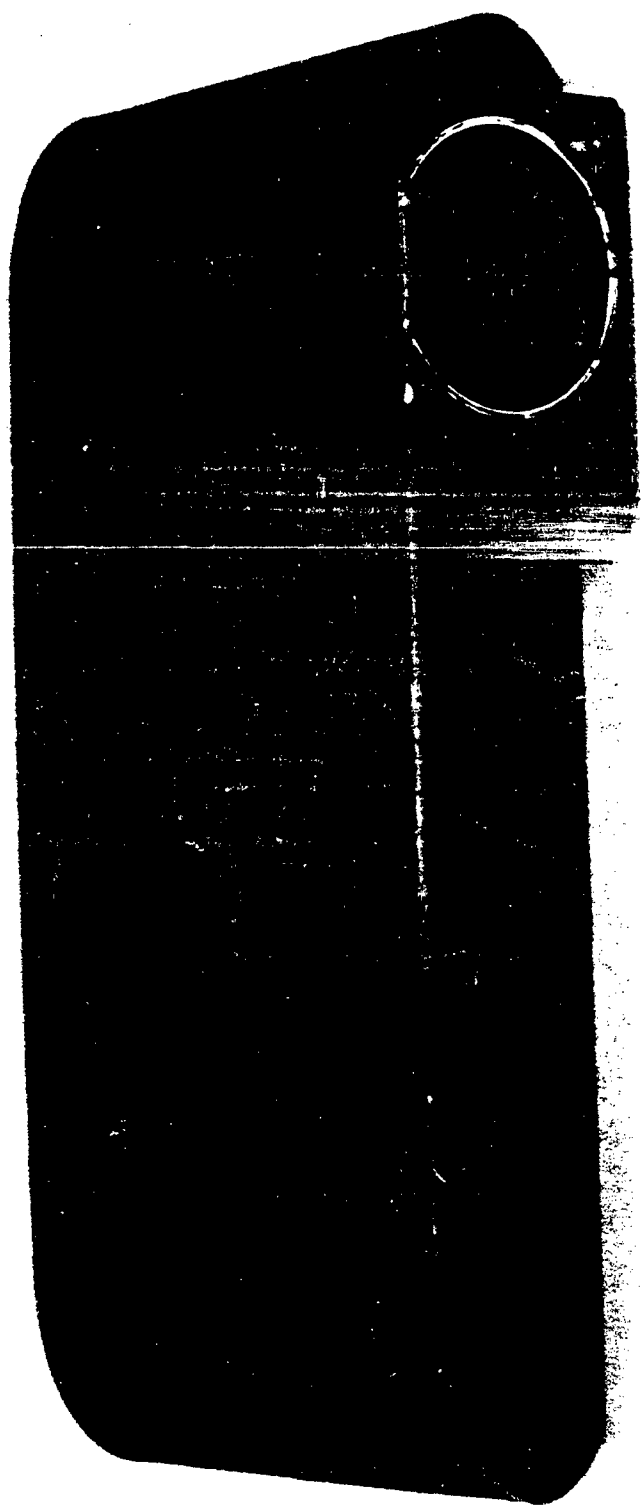
Figure 5-9. Eyepiece System

20

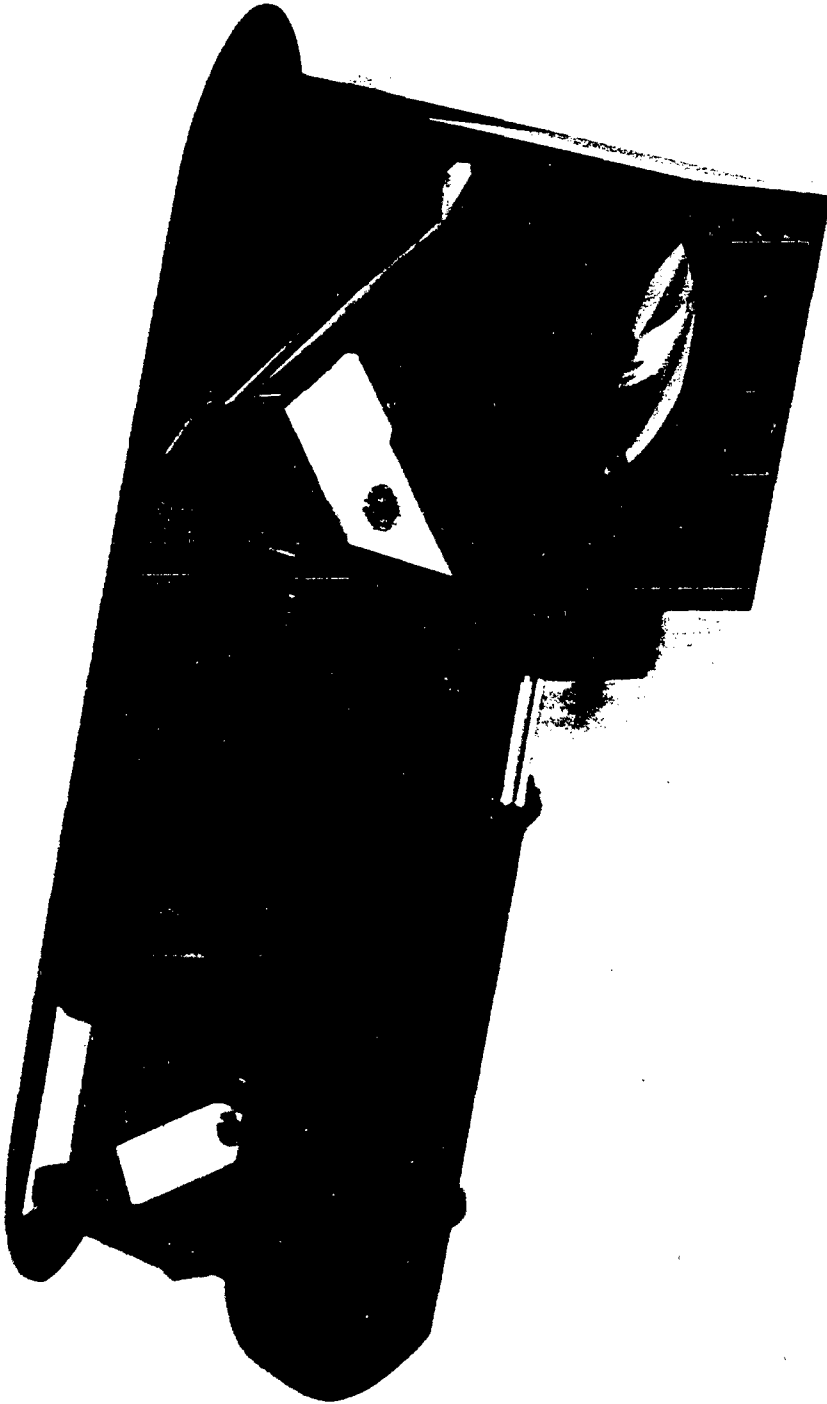Figure 5-10. Photograph of Vision Block Assembly

Figure 5-11. Photograph with Casing Removed

22

The resolution was evaluated by means of the USAF 1951 reso-
lution test target. This consists of groups of horizontal
and vertical 3-bar patterns of decreasing spacing. A group
is comprised of six elements where each element consists of
two bar patterns of three lines each, at right angles to
each other. The elements of each group have decreasing line
spacings in the step ratio of the 6th root of 2. Thus the
number of line pairs per mm doubles at every 7th element,
which starts a new group. The line pairs per mm are given
in Table 5-1 for all the elements of each group. The "bar
width" or "bar spacing" is the reciprocal of the "line pairs
per mm."

Two resolution patterns were used. The first was a large
wall chart on which were printed a number of USAF 1971
Resolution Targets at different locations and in different
colors. These targets contained Groups -2 to 3, Group 4
being too small to be useful in the far field.

The second was a thin glass reticle on which one USAF target
was photographically reproduced, consisting of Groups 1 to
7. This was for use in evaluating the resolution in the
intermediate focal plane. It was sandwiched between two
0.25 inch thick glass plates in the test cell slide.

Figure 5-12 shows a photograph of the resolution chart taken
through the vision block, while Figure 5-13 shows a similar
photograph with the reticle resolution target in the inter-
mediate focal plane. The distance to the chart was 9 ft.
(2743 mm), while the focal length of the objective lens is
71 mm, therefore, the image of the wall chart in the inter-
mediate focal plane was reduced by a factor of 2743/71 =
38.6. Since each successive element in the USAF 1971 pat-
tern is reduced by $2^{(1/6)}$, a reduction of 38.6 is a shift of
n elements where $2^{(n/6)} = 38.6$ and n = 31.6 or 5 groups plus
1.6 elements. For example, Element 1 of Group -2 of the
wall chart should appear the same size as element 2 or 3 of
Group +3 of the reticle pattern. Inspection of Figure 5-13
shows this to be the case.

The maximum resolution of the human eye is about 1 arc
minute or 0.0003 radians. At 9 ft. (2743 mm), this is 0.80
mm or 1.6 mm/line pair, which is 0.625 line pairs/mm. This
is Group -1, Element 3 of the wall chart. Shifting 31 ele-
ments, it corresponds to Group 4, Element 4 of the reticle
pattern. We see that these are just barely discernable in
Figures 5-12 and 5-13. This shows that the vision block
does not degrade the image seen by the eye. This experi-
mentally confirms the optical performance calculated and
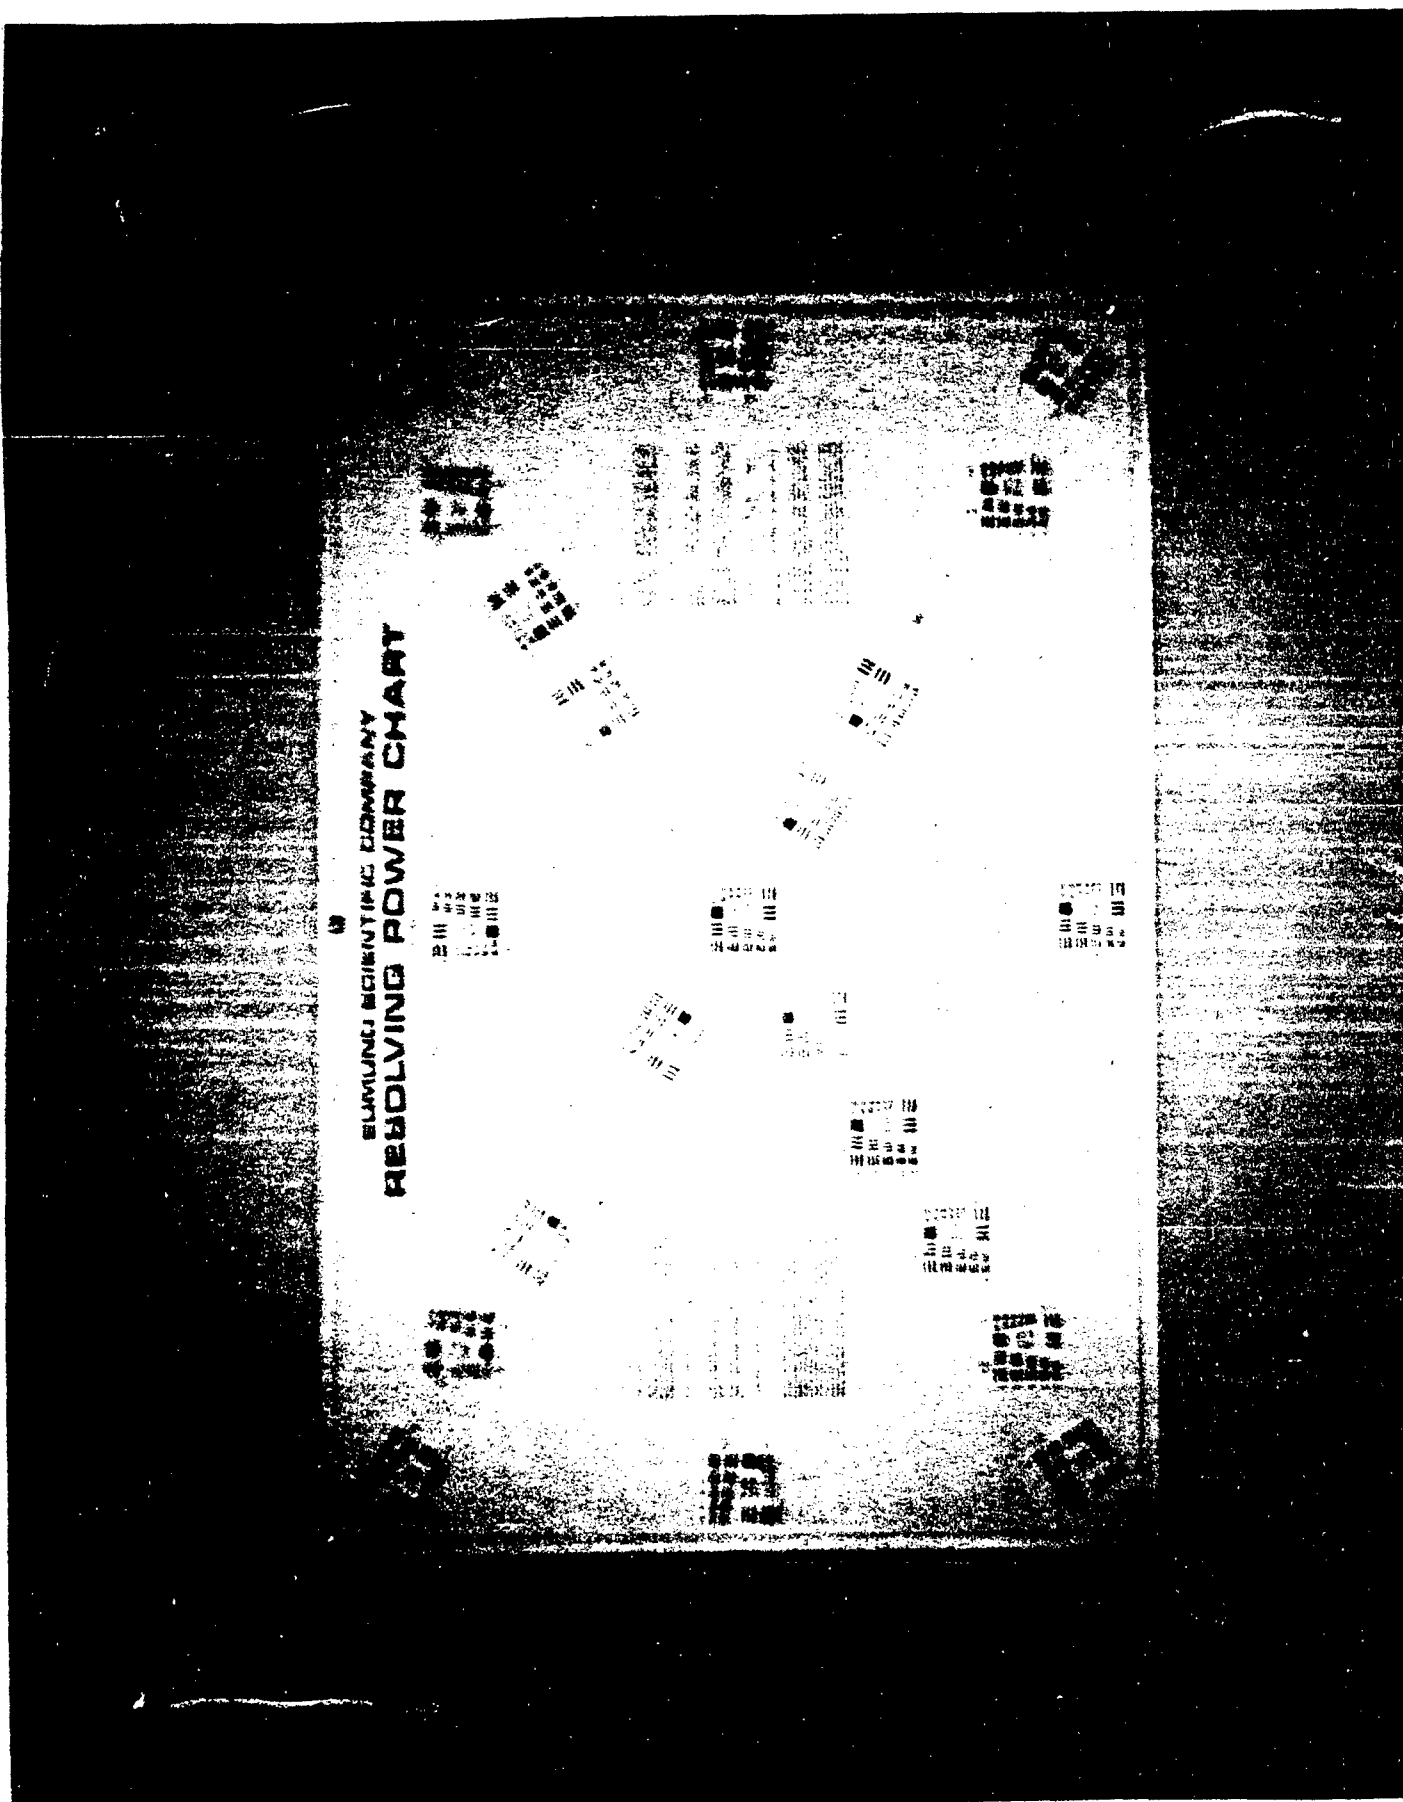shown in Figure 5-5.

23

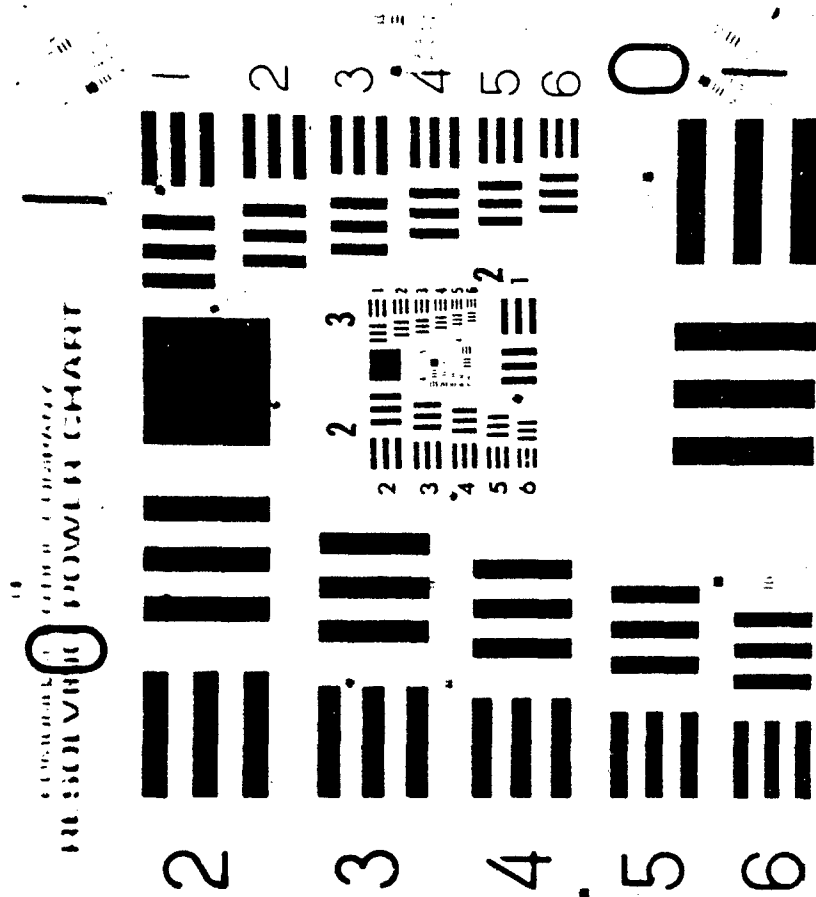Figure 5-12. Photograph of Resolution Chart Through Vision Block

24

Figure 5-13. Photograph of Resolution Chart with Resolution Reticle in Focal Plane

Table 5-1. U.S.A.F. 1971 Resolution Test Target

Element No.	Line Pairs Per mm						
	Group No.						
	-2	-1	0	1	2	3	4
1	0.250	0.500	1.00	2.00	4.00	8.00	16.0
2	0.281	0.561	1.12	2.24	4.49	8.98	17.95
3	0.315	0.629	1.26	2.52	5.04	10.1	20.16
4	0.354	0.707	1.41	2.83	5.66	11.3	22.63
5	0.397	0.794	1.59	3.17	6.35	12.7	25.39
6	0.445	0.891	1.78	3.56	7.13	14.3	28.51

The field of view cannot be measured accurately from the film because of a mismatch of exit pupil of the vision block with the entrance pupil of the camera, however, visual measurements confirmed the predicted 29° field.

The USAF test target patterns printed on the test chart are in different colors (red, blue and yellow) and at different locations over the field. There are no significant differences among them which shows that chromatic aberration, and off-axis aberrations are insignificant. Figure 5-14 shows a scene through the vision block and it will be seen that image sharpness is maintained over the entire field.
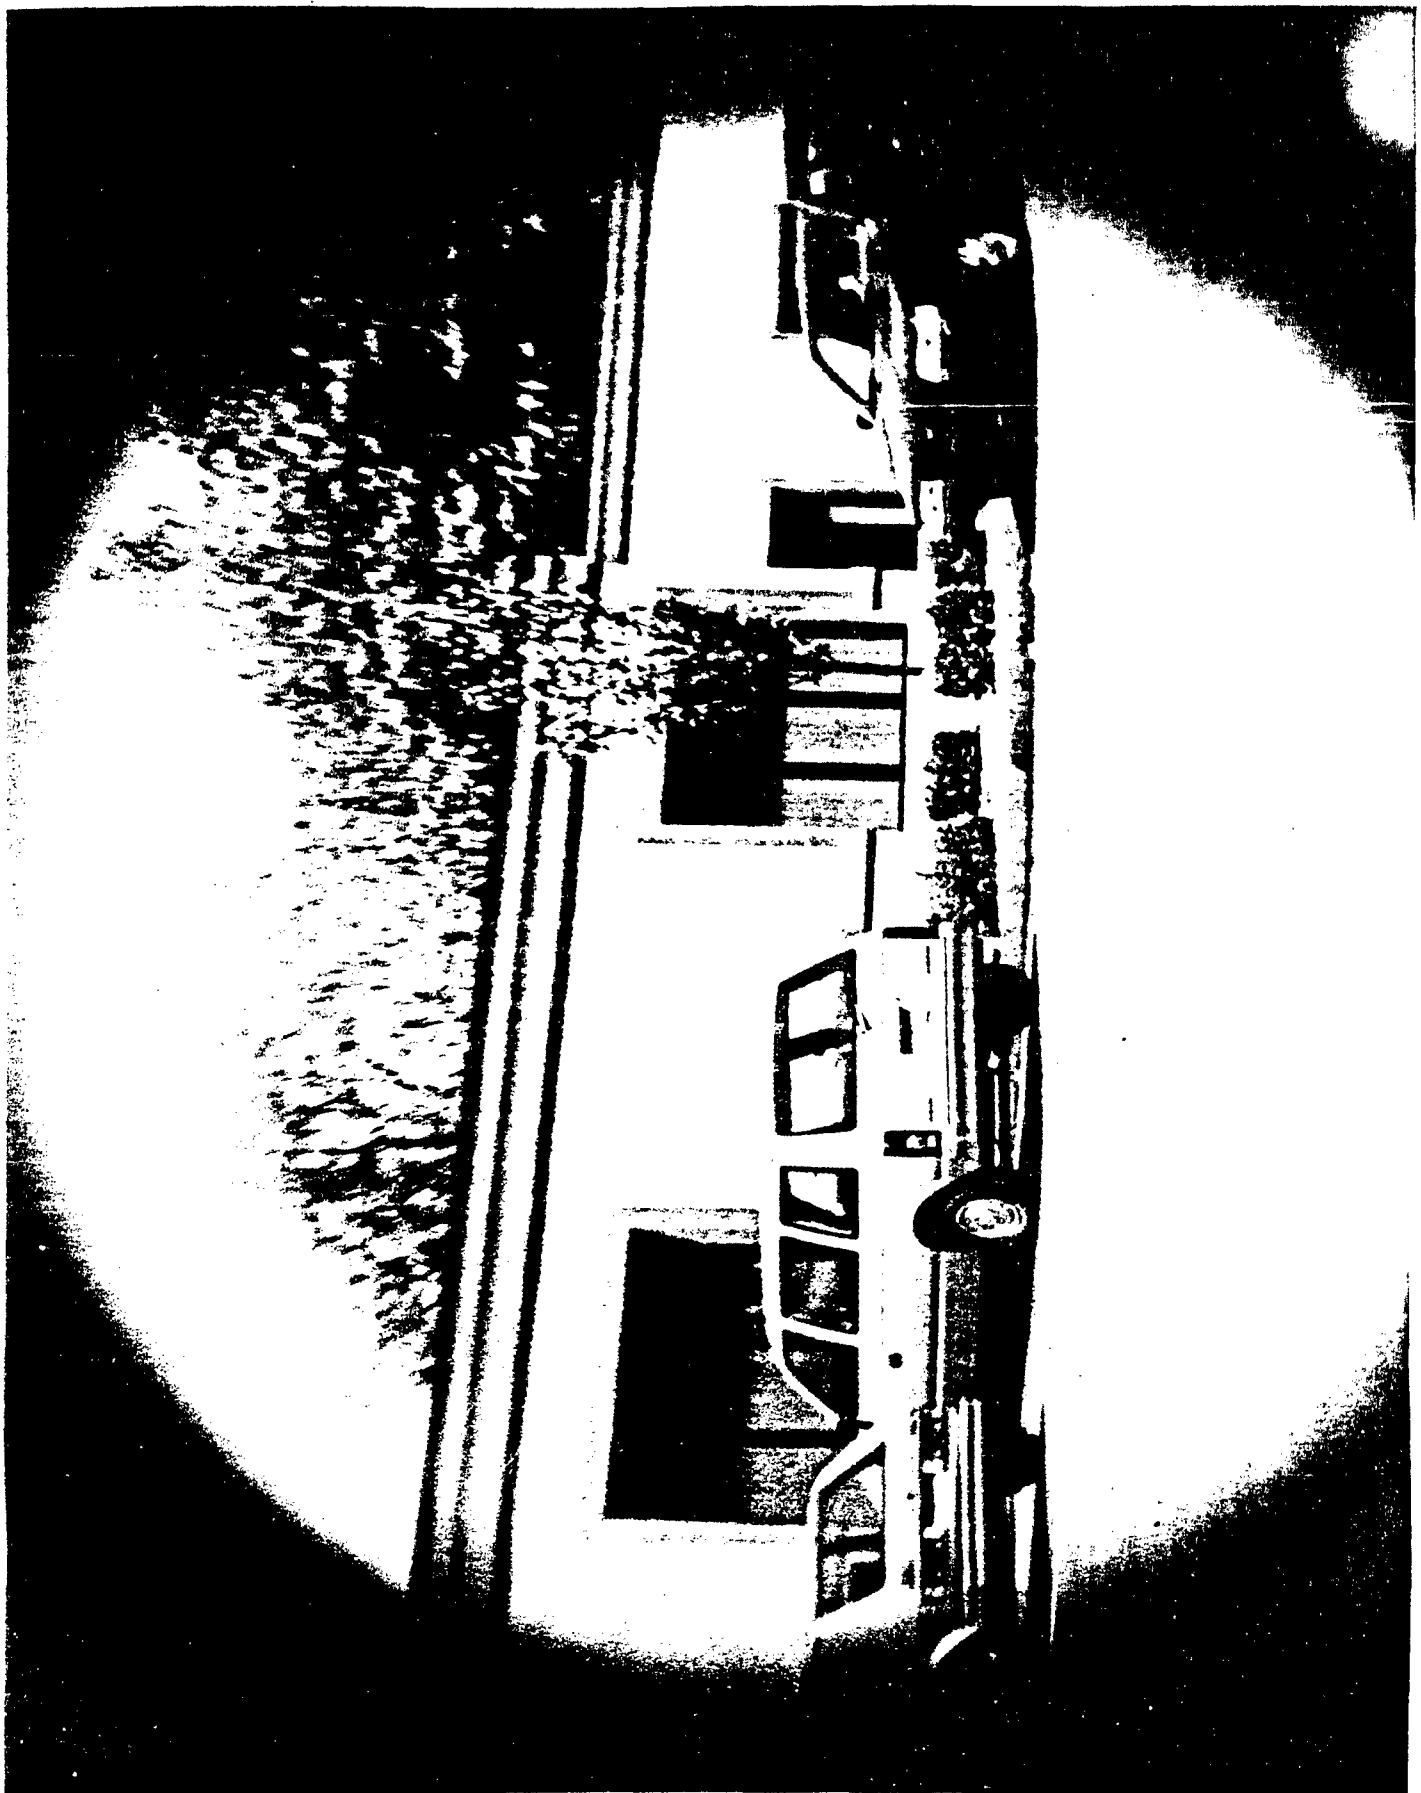
Figure 5-14. Photograph of Scene Through Vision Block

DISTRIBUTION LIST

Copies

Commander
Defense Technical Information Center
Bldg. 5, Cameron Station
ATTN: DDAC
Alexandria, Virginia   22304-9990

Manager
Defense Logistics Studies Information Exchange
ATTN: AMXMC-D
Fort Lee, Virginia   23801-6044

Commander
U.S. Army Tank-Automotive Command
ATTN: AMSTA-DDL (Technical Library)
Warren, Michigan   48398-5000

Commander
U.S. Army Tank-Automotive Command
ATTN: AMSTA-CF (Mr. G. Orlicki)
Warren, Michigan   48397-5000

EDO
CORPORATION

6 January 1989

51/3513-37

Commander
U.S. Army Tank - Automotive Command
Attention: AMSTA-RSC
Warren, Michigan 48397-5000

Commander
U.S. Army Tank - Automotive Command
Attention: AMSTA-TMS
Warren, Michigan 48397-5000

Commander
U.S. Army Tank - Automotive Command
Attention: AMSTA-DDL
Warren, Michigan 48397-5000

Subject: Submittal of Contract Deliverable
Data Item -- Final Report

Reference: DAAE07-87-C-R074
Barnes Project No. 51/3513

Gentlemen:

In accordance with the referenced contract, DD Form 1423, Sequence
No. A002, Barnes has forwarded herewith copies of the Final
Report. Your comments on the "Draft" report have been
incorporated as noted.

If you have any questions, please do not hesitate to contact the
undersigned.

Very truly yours,

EDO CORPORATION
BARNES ENGINEERING DIVISION

Judith D. Fazekas
Contracts Administrator

JDF:at
Enclosures: AMSTA-RSC 3/1
AMSTA-TMS 1/0
AMSTA-DDL 2/0

cc: AMSTA-IRDA - Steve Draper

\# 3513

Distribution for DD250

~~5 Shipping~~

1 - DCASMA

1 - OCASR-NY

~~2 Consignee~~

1 - Contract Administrator

1 - Project File

2 - U.S. Army Tank-Automotive Command ATTN: AMST
Directorate for Procurement and Production
Warren, MI 48397-5000